

AH512

HIGH-SENSITIVITY HALL-EFFECT SWITCH SENSOR

These Hall-effect switch integrated circuits are monolithic integrated circuit consisting of a voltage regulator, Hall-voltage generator, differential amplifier, schmitt trigger, temperature compensation circuit. Its input is a magnetic flux density signal and output is a digital voltage signal.

FEATURES

- . Wide supply voltage range
- . Fast response time
- . Wide frequency and temperature range
- . Long operating life
- . Small size, convenient installing
- . Output compatible with all digital logic families

TYPICAL APPLICATIONS

- | | |
|-------------------------|------------------------|
| . Contactless switch | . Position control |
| . Speed measurement | . Revolution detection |
| . Isolation measurement | . Brushless d.c motor |
| . Automotive ignitor | |

ABSOLUTE MAXIMUM RATING

Parameter	Symbol	Value	Unit
Supply voltage	V _{CC}	24	V
Magnetic flux density	B	Unlimited	mT
Output OFF voltage	V _{ce}	50	V
Continuous output current	I _{OL}	50	mA
Operating temperature range	T _A	-40~125	°C
Storage temperature range	T _S	-55~150	°C

ELECTRICAL CHARACTERISTICS

T_A=25°C

Parameter	Symbol	Test conditions	Type and Value			Unit
			min	typ	max	
Supply voltage	V _{CC}		4.5	-	24	V
Output saturation voltage	V _{OL}	I _{out} =20mA B>B _{RP}	-	200	400	mV
Output leakage current	I _{OH}	V _{out} =24V B<B _{RP}	-	0.1	10	μ A
Supply current	I _{CC}	V _{CC} =Output open	-	-	10	mA
Output rise time	t _r	R _L =820 Ω C _L =20PF	-	0.12	-	μ S
Output fall time	t _f	R _L =820 Ω C _L =20PF	-	0.18	-	μ S

HALL SENSORS

MAGNET CHARACTERISTICS



V_{CC}=4.5~24V

Parameter	Symbol	Type and Value			Unit
		min	typ	max	
Operate point	B _{OP}		4.0	6.0	mT
Release point	B _{RP}	-6.0	-4.0		mT
Hysteresis	B _H	2.0	4.0	-	mT



NOTE: 1mT=10GS

BLOCK DIAGRAM

MAGNETIC-ELECTRICAL TRANSFER CHARACTERISTICS

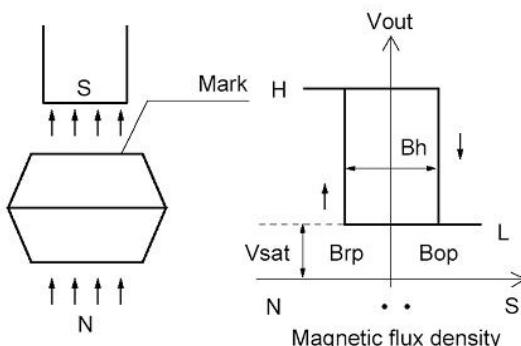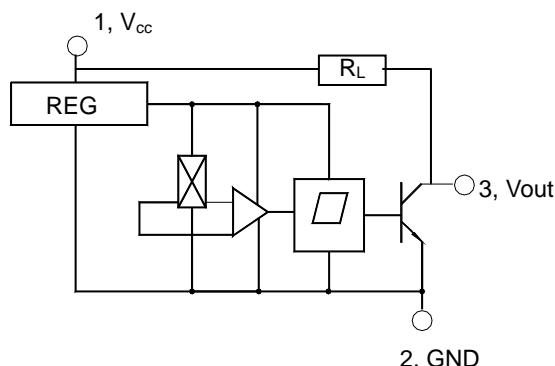

DIMENSIONS (in: mm)

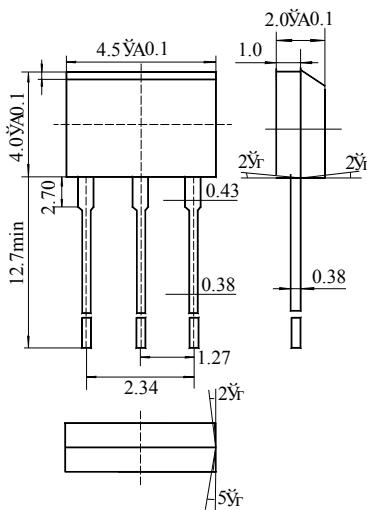

1. V_{cc} 2. GND 3. OUTPUT

Active Area Depth

Branded Surface

- Cautions**

 1. When install, should as full as possible decrease the mechanical stress acting on the Hall IC, to avoid the influence of the operate point and release point.
 2. On the premise of ensuring welding quality, use as possible as low welding temperature as short time



HALL SWITCH