


SOD-3 23 Plastic-Encapsulate Diodes

FEATURES

- Small surface mounting type
- High speed
- High reliability with high surge current handling capability

MARKING: A

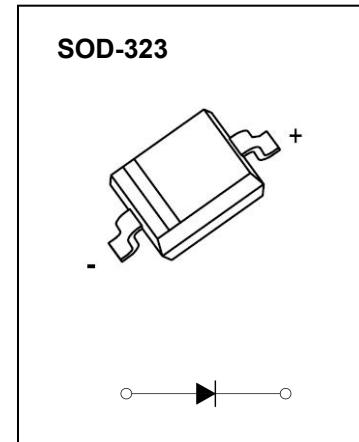





Maximum Ratings and Electrical Characteristics, Single Diode @Ta=25°C


Parameter	Symbol	Limit	Unit
Non-repetitive peak reverse voltage	V _{RM}	90	V
DC blocking voltage	V _R	80	V
Peak forward current	I _{FM}	225	mA
Average rectified output current	I _O	100	mA
Non-Repetitive Peak Forward Surge Current @t=8.3ms	I _{FSM}	2.0	A
Power Dissipation	P _D	200	mW
Thermal Resistance from Junction to Ambient	R _{θJA}	625	°C/W
Junction temperature	T _J	150	°C
Storage temperature	T _{STG}	-55~+150	°C

Electrical Ratings @Ta=25°C

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Forward voltage	V _F			1.2	V	I _F =100mA
Reverse current	I _R			0.1	µA	V _R =80V
Capacitance between terminals	C _T			3	pF	V _R =0.5V,f=1MHz
Reverse recovery time	t _{rr}			4	ns	I _F =10mA ,V _R =6V,R _L =100Ω


Typical Characteristics

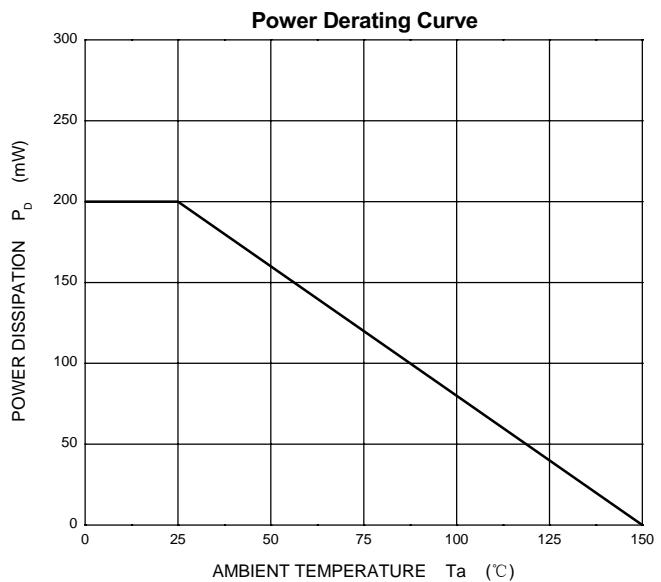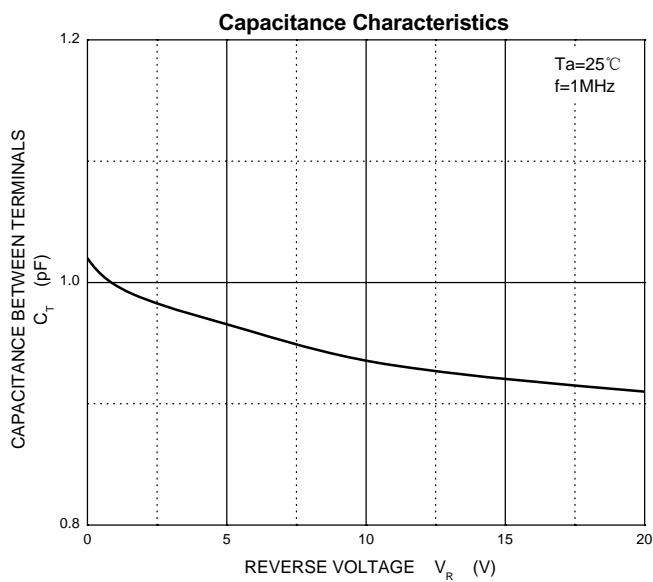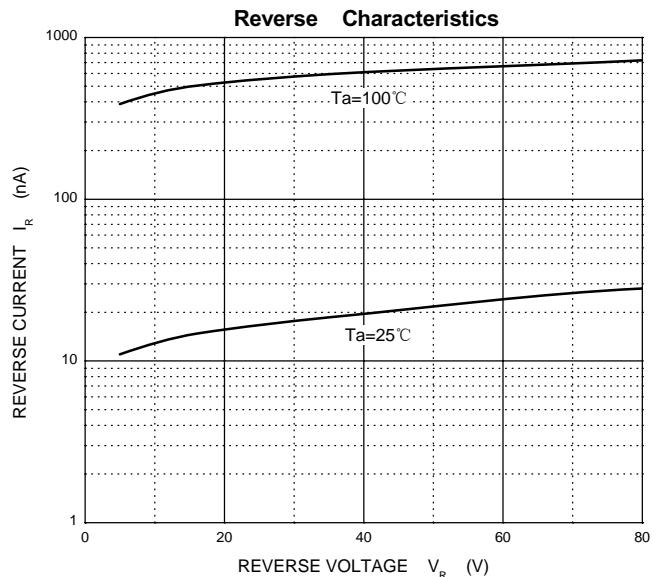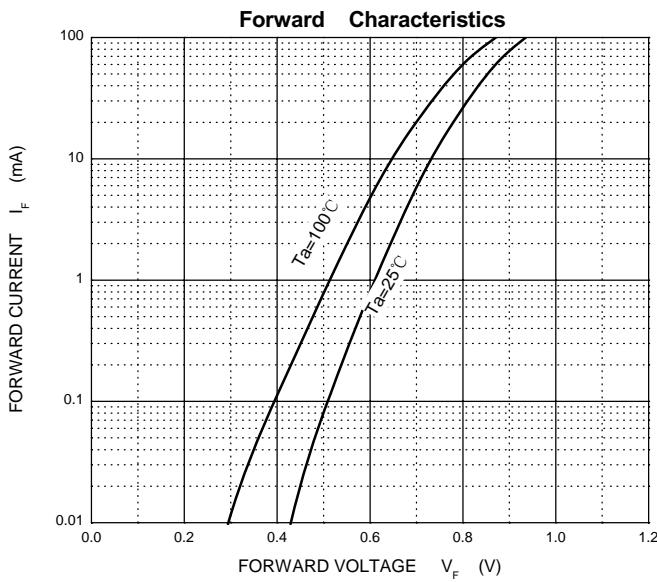

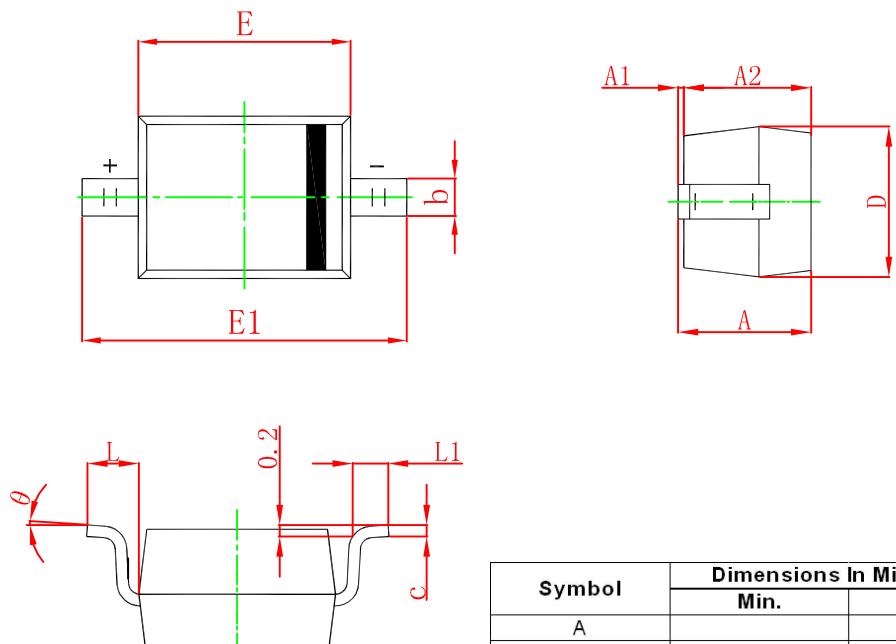

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.000		0.039	
A1	0.000	0.100	0.000	0.004
A2	0.800	0.900	0.031	0.035
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	1.200	1.400	0.047	0.055
E	1.600	1.800	0.063	0.071
E1	2.550	2.750	0.100	0.108
L	0.475 REF.		0.019 REF.	
L1	0.250	0.400	0.010	0.016
θ	0°	8°	0°	8°

SOD-323 Suggested Pad Layout

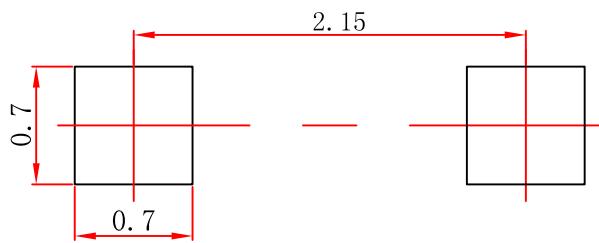

Note:

1. Controlling dimension:in millimeters.
- 2.General tolerance: $\pm 0.05\text{mm}$.
- 3.The pad layout is for reference purposes only.